


MODEL: BP C1375Q (BF-C1375Q)

400V | 1500rpm | 50Hz

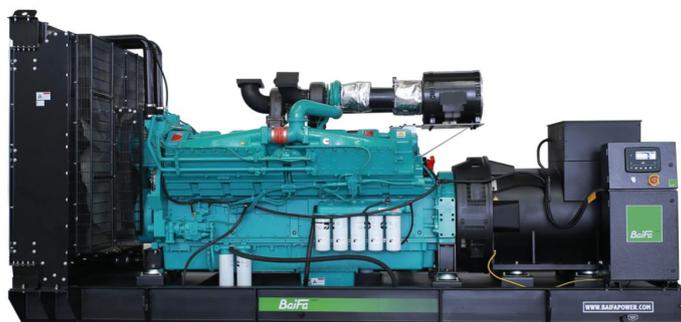

ESP Standby Power	1375 kVA	PRP Prime Power	1250 kVA
ENGINE	CCEC Cummins QSK38-G5	ALTERNATOR	STAMFORD S6L1D-G4

GENERAL FEATURES

Engine: CCEC Cummins QSK38-G5	Alternator: single bearing, IP23, insulation class H
40°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: BP C1375Q (BF-C1375Q)**400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	1804	1100/1375	1000/1250
415/240	50	3	0.8	1913	1100/1375	1000/1250
400/230	50	3	0.8	1985	1100/1375	1000/1250
380/220	50	3	0.8	2089	1100/1375	1000/1250

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Berca Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date Berca sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Berca Power or distributors in your location.

**MODEL: BP C1375Q (BF-C1375Q)****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins QSK38-G5
----------------------	-----------------------

Air intake system	Turbo, Air/Water cooling
-------------------	--------------------------

Fuel system	MCRS
-------------	------

Cylinder arrangement	12 in V
----------------------	---------

Displacement	37.7L
--------------	-------

Bore and stroke	159×159 (mm)
-----------------	--------------

Compression ratio	15:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	1224KW/1641HP
-----------------------------------	---------------

Governor type	MCRS
---------------	------

Exhaust System

Exhaust gas flow	234.72 m ³ /min
------------------	----------------------------

Exhaust temperature	486 °C
---------------------	--------

Max back pressure	7kPa
-------------------	------

Air Intake System

Max intake restriction	6.2kPa
------------------------	--------

Combustion air flow	95.7 m ³ /min
---------------------	--------------------------

Air flow required for radiator	1200 m ³ /min
--------------------------------	--------------------------

Comprehensive Solutions For

POWER GENERATION

MODEL: BP C1375Q (BF-C1375Q)**400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	208 g/kWh	267 L/h
Fuel consumption @ 75% (Prime Power) Load	208 g/kWh	201 L/h
Fuel consumption @ 50% (Prime Power) Load	233 g/kWh	153 L/h

Oil System

Total oil capacity	170L
Oil consumption	≤4g/kwh
Oil sump capacity	140~166L

Cooling System

Coolant capacity	300L
Max water temperature	104°C

MODEL: BP C1375Q (BF-C1375Q)

400V | 1500rpm | 50Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	<2%
Alternator Capacity	1260kVA
Alternator Efficiency	94.8%

**MODEL: BP C1375Q (BF-C1375Q)****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools



MODEL: BP C1375Q (BF-C1375Q)

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

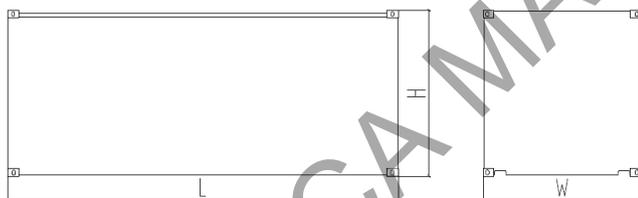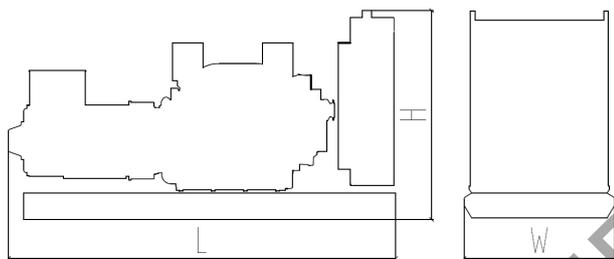

Standard Configuration (open type)

Overall Dimensions: 4720×2150×2400 mm

Weight: 7900 kg

Soundproof Type (standard 20'ft GP container)

Overall Dimensions: 6058×2438×2591 mm

Weight: 12900 kg

Specifications are subject to change without notice.



PT. BERCA MANDIRI PERKASA

Jln. Pangeran Jayakarta 149A, Jakarta 10730 - INDONESIA
Phone. +62 21 6006125, 6399190, 6280900,
Fax. +62 21 6399191
Email. bmp@berca-mp.co.id
www.berca-mp.co.id

Parts and Service :

Jl. Agung Utara I Blok A2 Kav. 16/31
Sunter Agung Podomoro, Jakarta 14530
Phone. +62 21 6459448-49, 64711877
Fax. +62 21 6471527

Subsidiary of :



BRANCH NETWORKS :

JAKARTA (021) 7361978 ADARO (0526) 2701578 ASEM REGES (021) 6281241 BALIKPAPAN (0542) 761978 BANDUNG (022) 42827424 BANJARMASIN (0511) 3251979 BATAM (0778) 471171
BATU KAJANG (0543) 5230488 BENETE (0373) 635260 BENGKULU (0736) 5511170 BERNGALON (0812) 25430084 BERAU (0554) 2020118 BITUNG (0438) 35078 CIKARANG (021) 80679307 CILACAP (0282) 5567602
CILEGON (0254) 390678 DENPASAR (0361) 4763466 JAMBI (0828) 63408 KETAPANG (0534) 24476 KENDARI (0401) 3082554 KUPANG (0380) 8441038 LAMPUNG (0721) 789976 MAKASSAR (0411) 4741305
MANADO (0431) 812612 MEDAN (061) 8449978 MELAK (0813) 47371283 MUARA ENIM (0734) 5900000 MOROWALI (0812) 18368082 PADANG (0751) 4485624 PALANGKARAYA (0536) 4256052 PALEMBANG (0711) 364453
PALU (0811) 4554798 PANGKALPINANG (0717) 439578 PEKANBARU (0761) 567678 PONTIANAK (0561) 748670 SAMARINDA (0541) 261978 SAMPIT (0531) 2611978 SANGATTA (0549) 23360 SATUI (0512) 61575
SEMARANG (024) 3581371 SORONG (0951) 3138830 SURABAYA (031) 847595753 TANJUNG PINANG (0771) 8080177 TARAKAN (0551) 3829585 TEMBAGAPURA (0901) 462652