


MODEL: BP C1600 (BF-C1600)

400V | 1500rpm | 50Hz

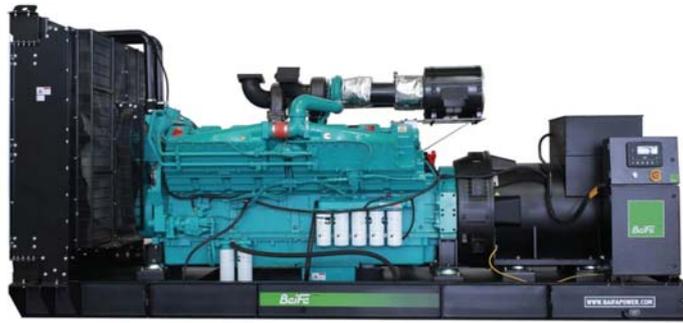

ESP Standby Power	1650 kVA	PRP Prime Power	1500 kVA
ENGINE	CCEC Cummins	ALTERNATOR	STAMFORD
	KTA50-GS8		S7L1D-C4

GENERAL FEATURES

Engine: CCEC Cummins KTA50-GS8

Alternator: single bearing, IP23, insulation class H

40°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: BP C1600 (BF-C1600)

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	2165	1320/1650	1200/1500
415/240	50	3	0.8	2295	1320/1650	1200/1500
400/230	50	3	0.8	2381	1320/1650	1200/1500
380/220	50	3	0.8	2506	1320/1650	1200/1500

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Berca Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date Berca sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Berca Power or distributors in your location.

**MODEL: BP C1600 (BF-C1600)****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	CCEC Cummins KTA50-GS8
Air intake system	Turbo, Air/Water cooling
Fuel system	PT type fuel pump, EFC
Cylinder arrangement	16 in "V"
Displacement	50.3L
Bore and stroke	159*159 (mm)
Compression ratio	14.9:1
Rated speed	1500rpm
Max. Standby power at rated speed	1429KW/1944HP
Governor type	Electronic

Exhaust System

Exhaust gas flow	261 m ³ /min
Exhaust temperature	510 °C
Max back pressure	7kPa

Air Intake System

Max intake restriction	6.23kPa
Combustion air flow	99.3 m ³ /min
Air flow required for radiator	1680 m ³ /min

**MODEL: BP C1600 (BF-C1600)****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	204 g/kWh	313 L/h
Fuel consumption @ 75% (Prime Power) Load	210 g/kWh	243 L/h
Fuel consumption @ 50% (Prime Power) Load	221 g/kWh	175 L/h

Oil System

Total oil capacity	204L
Oil consumption	≤4g/kwh
Oil sump capacity	148~178L

Cooling System

Coolant capacity	380L
Max water temperature	104°C

**MODEL: BP C1600 (BF-C1600)****400V | 1500rpm | 50Hz****ALTERNATOR SPECIFICATION**

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	1550kVA
Alternator Efficiency	95.4%

**MODEL: BP C1600 (BF-C1600)****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special tools




MODEL: BP C1600 (BF-C1600)

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

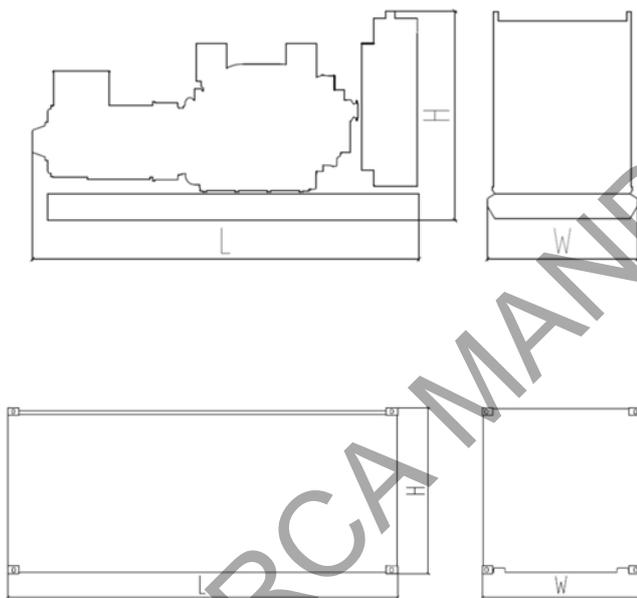

Standard Configuration (open type)

Overall Dimensions: 5550×2150×2550 mm

Weight: 11000 kg

Soundproof Type (standard 20'ft HQ container)

Overall Dimensions: 6058×2438×2896 mm

Weight: 16000 kg

Specifications are subject to change without notice.



PT. BERCA MANDIRI PERKASA

Jln. Pangeran Jayakarta 149A, Jakarta 10730 - INDONESIA
 Phone. +62 21 6006125, 6399190, 6280900,
 Fax. +62 21 6399191
 Email. bmp@berca-mp.co.id
 www.berca-mp.co.id

Parts and Service :

Jl. Agung Utara I Blok A2 Kav. 16/31
 Sunter Agung Podomoro, Jakarta 14530
 Phone. +62 21 6459448-49, 64711877
 Fax. +62 21 6471527

Subsidiary of :



BRANCH NETWORKS :

JAKARTA (021) 7361978 ADARO (0526) 2701578 ASEM REGES (021) 6281241 BALIKPAPAN (0542) 761978 BANDUNG (022) 42827424 BANJARMASIN (0511) 3251979 BATAM (0778) 471171
 BATU KAJANG (0543) 5230488 BENETE (0373) 635260 BENGKULU (0736) 5511170 BERNGALON (0812) 25430084 BERAU (0554) 2020118 BITUNG (0438) 35078 CIKARANG (021) 80679307 CILACAP (0282) 5567602
 CILEGON (0254) 390678 DENPASAR (0361) 4763466 JAMBI (0828) 63408 KETAPANG (0534) 24476 KENDARI (0401) 3082554 KUPANG (0380) 8441038 LAMPUNG (0721) 789976 MAKASSAR (0411) 4741305
 MANADO (0431) 812612 MEDAN (061) 8449978 MELAK (0813) 47371283 MUARA ENIM (0734) 5900000 MOROWALI (0812) 18368082 PADANG (0751) 4485624 PALANGKARAYA (0536) 4256052 PALEMBANG (0711) 364455
 PALU (0811) 4554798 PANGKALPINANG (0717) 439578 PEKANBARU (0761) 567678 PONTIANAK (0561) 748670 SAMARINDA (0541) 261978 SAMPIT (0531) 2611978 SANGATTA (0549) 23360 SATUI (0512) 61575
 SEMARANG (024) 3581371 SORONG (0951) 3138830 SURABAYA (031) 847595753 TANJUNG PINANG (0771) 8080177 TARAKAN (0551) 3829585 TEMBAGAPURA (0901) 462652